



## QUEST ELITE 4000

4-FLAVORPOST-MIX  
JUICE DISPENSER



## FEATURES

**Wide product/ratio capability** – Handles a wide range of post-mix products including juices with pulp, teas and cold coffees

**Frost-free refrigeration compartment** – Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

**Large 14-16lb ice bank** – Provides cold drinks during peak demand

**Patented mixing system** – Delivers consistent quality drinks with no stratification, slugging or dripping

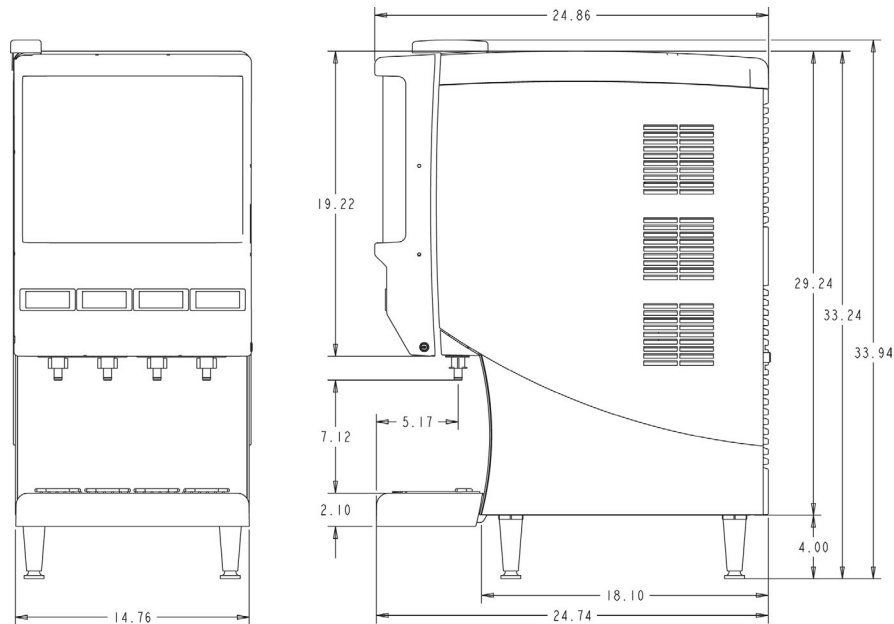
**LED illuminated graphics** – Eliminates lost sales due to 'lights out' and reduces life costs

**Narrow footprint** – Conserves counter space

**Easy to service** – Modular component design and ease of access speeds service




**'Sold out' indication** – Alerts operator to product out condition and maximizes sales

**Optional flush feature** – Speeds maintenance and promotes product safety



PART NUMBER	DESCRIPTION
721414101JU1	Quest Elite 4 flavor, illuminated, flush, push button 115/60
721414111JU1	Quest Elite 4 flavor, illuminated, flush, portion control 115/60
721404100JU1	Quest Elite 4 flavor, non-illuminated, non-flush, push button 115/60
721414201JU1	Quest Elite 4 flavor, illuminated, flush, push button 230/50
721414211JU1	Quest Elite 4 flavor, illuminated, flush, portion control 230/50
729011003	Extended Panel Kit for Pitchers/Carafes
720500066	Refillable Concentrate Reservoir (4) 3.5 L
729011152	Cup Locator
729011125	Bag-In-Box Option Kit

## TECHNICAL SPECIFICATIONS

REFRIGERATION . . . . .	Hermetically sealed system, R-134a refrigerant 6.2 oz (190 g)	WATER SUPPLY REQUIREMENTS 50 psi (3.4 bar): Recommended dynamic operating pressure 80 psi (5.15 bar): Max static pressure 20 psi (1.38 bar): Min dynamic pressure
ICE BANK . . . . .	14-16lb	
CABINETRY . . . . .	High impact plastic cabinetry with stainless steel front panel	
DISPENSER DIMENSIONS . . . . .	29.3"H x 15"W x 24.3"D (74.4 cm x 37.5 cm x 61.7 cm)	COOLING . . . . . Three 12 oz drinks/min (355 mL) @ 75°F (24°C) ambient, 75°F (24°C) incoming water, and 41°F (4°C) concentrate w/o exceeding a 40°F (4°C)
WEIGHT . . . . .	Dry: 120 lb (54.4 kg) Operating: 185 lb (83.9 kg)	FLOW RATE . . . . . Adjustable water flow rate from 1-2.2 oz/sec
RECOMMENDED CLEARANCE . . . . .	Back: 4" (10.16 cm) Top: 12" (34.8 cm) Sides: 1" (2.54 cm)	AGENCY LISTINGS . . . . .
WATER CONNECTION . . . . .	0.375" (0.95 cm) SAE male flare SAE fitting on dispenser	  
CONCENTRATE STORAGE . . . . .	Four 3.5 L bottles	

